


OWNERS INSTRUCTION MANUAL

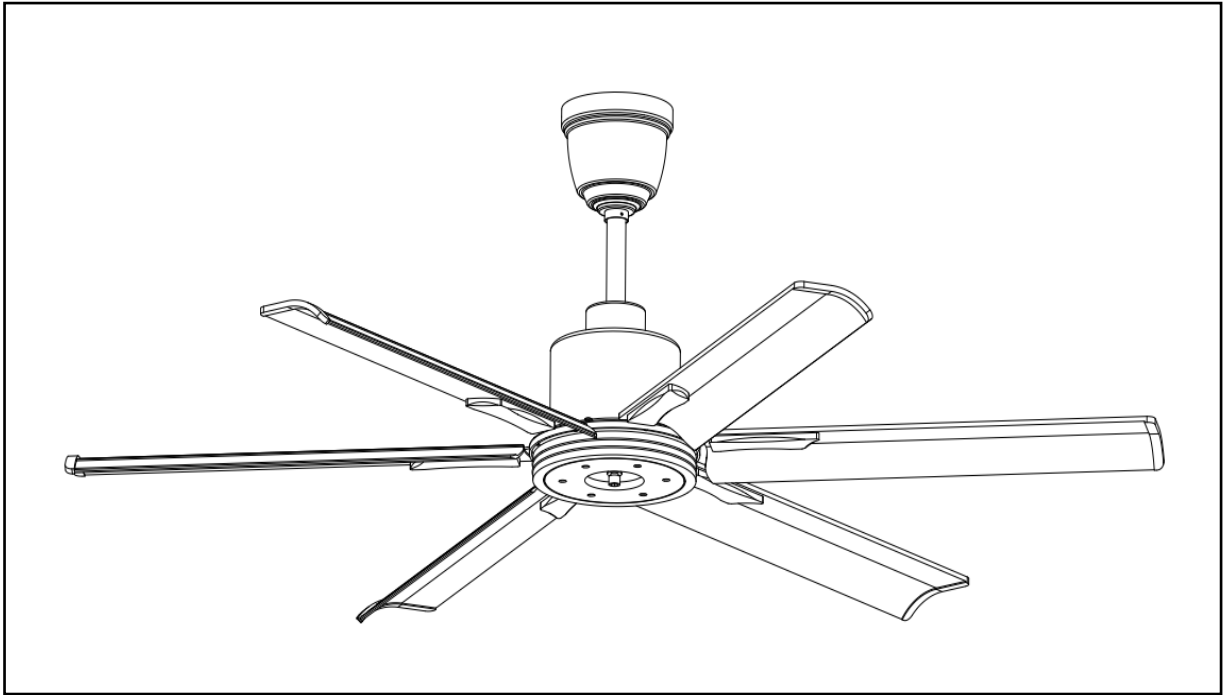


- Assembly & Installation
- Operation

READ AND SAVE THESE INSTRUCTIONS

WARNING: TO REDUCE THE RISK OF FIRE, ELECTRICAL SHOCK, OR INJURY TO PERSONS, PLEASE OBSERVE THE FOLLOWING:

- 1.To ensure the success of the installation, read the instructions and review the diagrams thoroughly before beginning.
- 2.To avoid possible electric shock, ensure electricity is turned off at the main power box before wiring. All electrical connections must be made in accordance with local codes, ordinances, and/or the National Electric Code. If you are unfamiliar with the methods of installing electrical wiring and products, seek the services of a qualified and licensed electrician. Also, consult someone who can check the strength of the supportive ceiling members and make the proper installations and connections.
- 3.Ensure that your installation site will not allow rotating fan blades to come in contact with any object. Blades should be at least 7 Feet from the floor when the fan is in operation.
- 4.If possible, mount the ceiling fan on a ceiling joist that must be able to support the motion and weight of the moving fan. If the fan will be mounted on a ceiling outlet box, a 4" x 2-1/8" deep METAL octagon box is required; one UL listed as "suitable for fan support." The box and its supporting members must not be able to twist or work loose. DO NOT USE PLASTIC BOXES. Installation on a concrete ceiling should be performed by qualified personnel.
- 5.Blades should be attached after the motor housing is hung and in place. The fan motor housing should be kept in the carton until ready to be installed to protect its finish. If you are installing more than one ceiling fan, make sure that you do not mix fan blade sets.
- 6.After making electrical connections, spliced conductors should be turned upward and pushed carefully up into the outlet box. The wires should be spread apart with the grounded conductor and the equipment-grounding conductor on one side of the outlet box and the "HOT" wires on the other side.
- 7.Electrical diagrams are for reference only. Light kits that are not packed with the fan must be UL/ETL listed and should be installed per the light kit's installation instructions.
- 8.After the fan is completely installed, check to make sure that all connections are secure to prevent the fan from falling and/or causing damage or injury.
- 9.The fan can work immediately after installation. The bearings are adequately charged with grease, so under normal conditions, further lubrication should not be necessary.
- 10.The fan must be turned off and stopped before reversing the fan direction.
- 11.The fan is not suitable for a sloped ceiling.
- 12.This fan is reversible.
- 13.This fan includes a light kit.
- 14.This fan is controlled by remote.
- 15.This fan is suitable for indoor use.

ASSEMBLY DRAWING

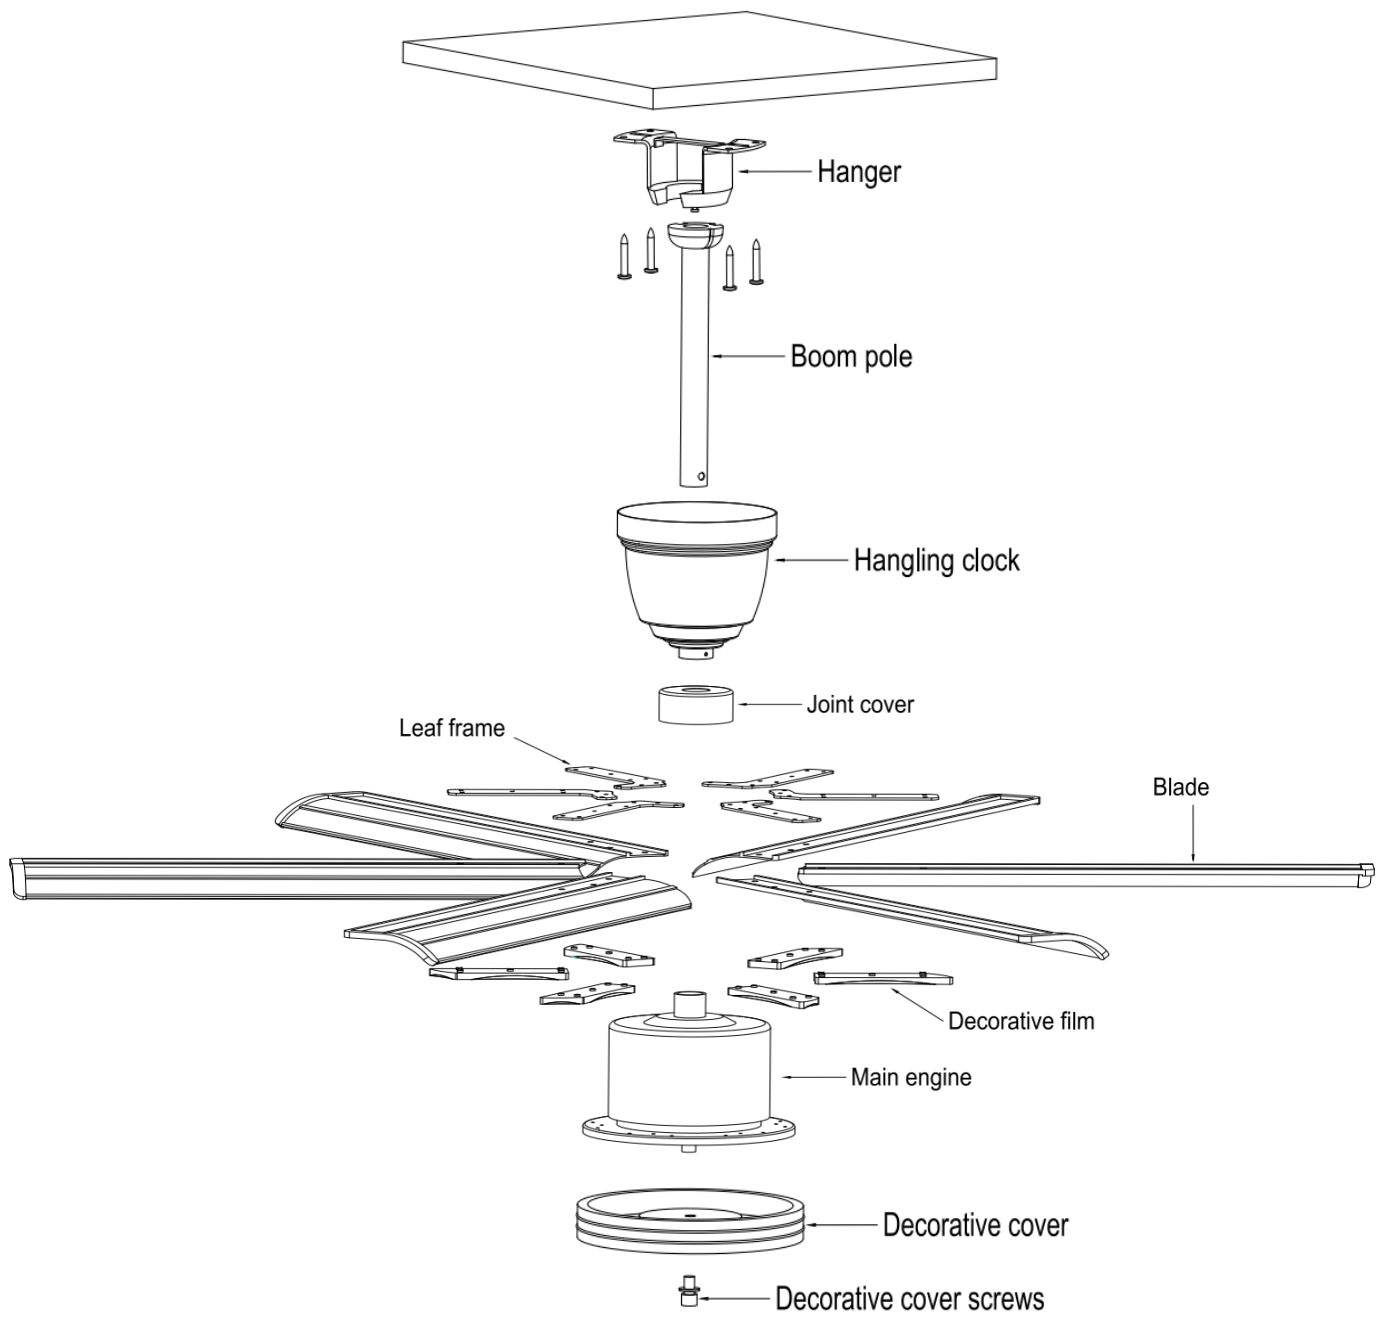


INSTALLATION

NOTE:All set screws must be checked and re-tightened where necessary,before and after installation.

WARNING: Be sure to turn off power before installation.


All electrical work should only be undertaken after disconnection of the power by removing fuses or turning off the circuit breaker to ensure all pole isolation of the electrical supply.

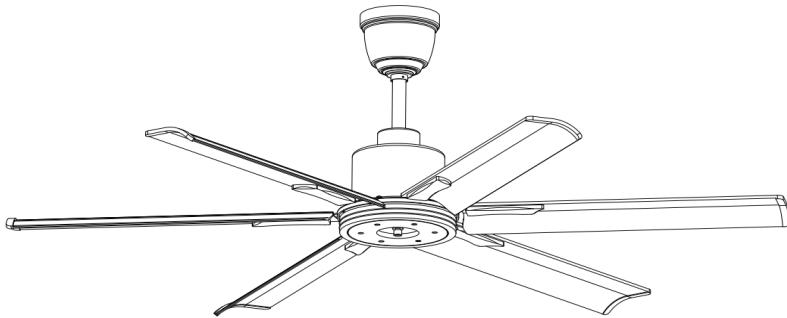

The following steps will guide you to a successful installation:

1. Hanging bracket installation
2. Assemble Downrod
3. Mount Blades To Motor
- 4 . Final Assembly

1. Hanger bracket installation

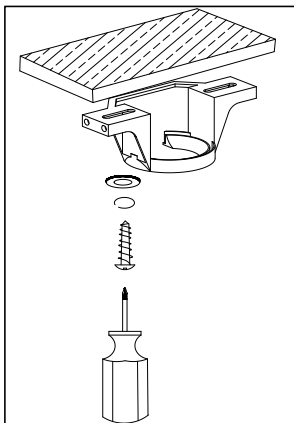


The hanger bracket should be screwed on to a firm flat surface. The fixing location must be able to withstand ten times the static weight of the fan. In most situation two wood screws screwed into a wooden joist is more than adequate to support your ceiling fan

The hanger bracket should be screwed onto the joist with the two wood screws provided. The washers provided should go in the following sequence:

Screw head > Steel round washer > Black rubber round washer > Hanger bracket > Ceiling. Screw the hanger bracket to the ceiling and make sure all connections are secure to prevent the fan from falling . Fixings must screw into a joist and not just the plasterboard. Loosen the two canopy screws from the hanger bracket.

2. Assemble Downrod


- Use a screwdriver to loosen the upper jam screw on the yoke.
- Position the downrod inside the canopy and yoke cover.
- Route wires existing yoke on the motor through the canopy and downrod.
- Position the downrod into the yoke and align holes in the yoke and downrod.
- Insert the bolt through the hole in the yoke and downrod. Be careful not to damage or cut the fan wires.
- Fix the bolt with the cotter pin through the hole in the end of the bolt.
- Secure the downrod in position by tightening the upper jam screw.

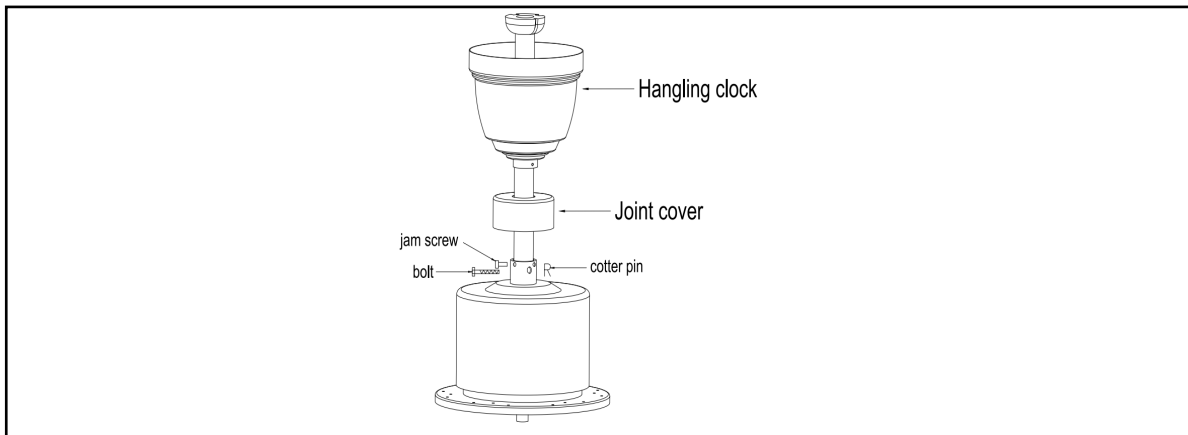


3. Mount Blades To Motor

NOTE: Fan comes with three rubber stops (optional on some models) on motor for shipping purposes only. Remove stops before running motor or installing blades to motor.


- Obtain blade screws and washers from motor assembly.
- Place washers over the blade screws, position blade screw in holes of blade, tighten them to motor-assembly securely.

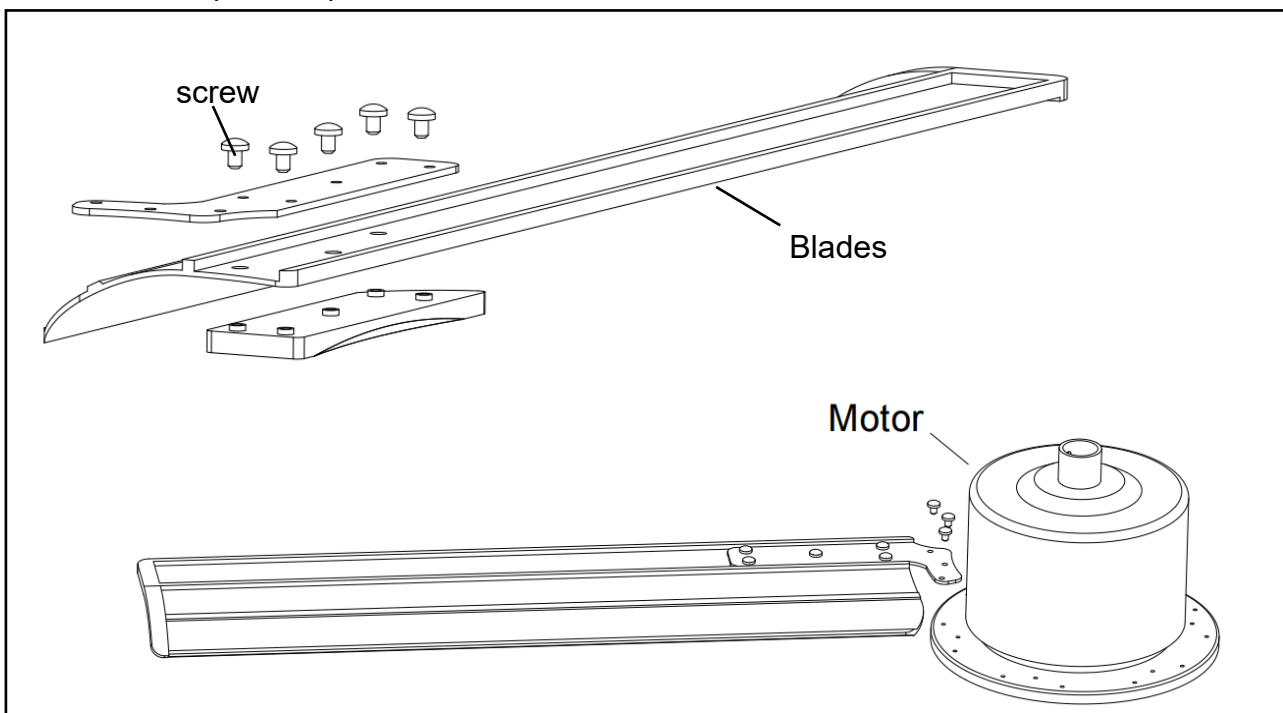


4.1 Tightening the screw with the motor.

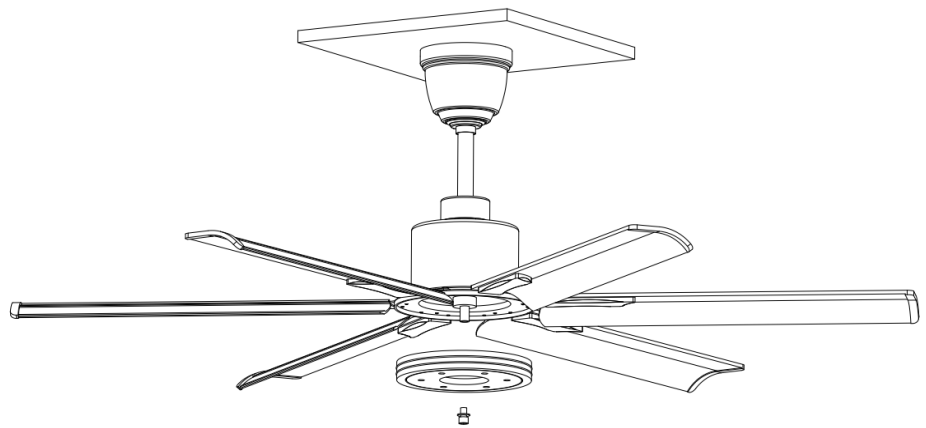

4.2 Installation completed.

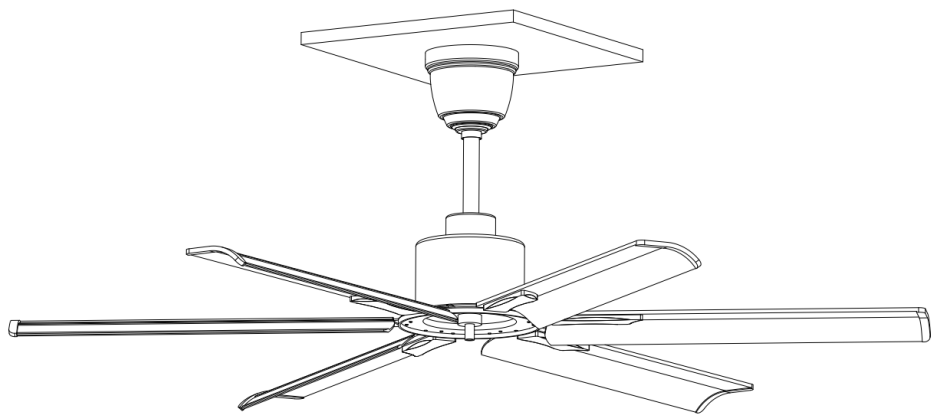

The receiver wiring instructions

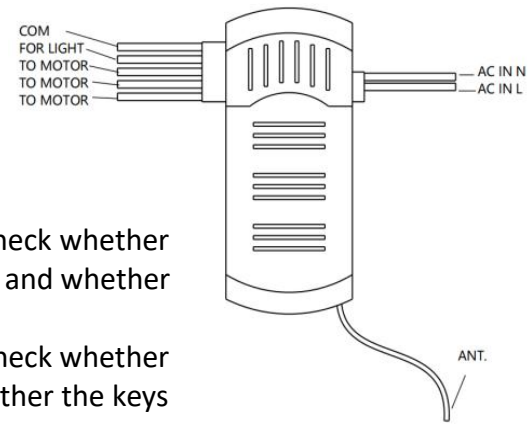


Notices

1. When the emitter is unable to remotely control the receiver, please check whether the switch batteries are in good control. whether they are fixed properly and whether they run of use.
2. When the emitter is unable to remotely control the receiver, please check whether there is other remote control products around the space and check whether the keys are pressed down, because same nature of remote control product may caused interference with each other resulting in poor receiving effect. Taking away such articles will normalize the remote control function.
3. Please use this product under applicable voltage.
Too low voltage will lead to failure of the remote controller to work
(please refer to the product label for the voltage range and related Parameters)
4. Please take out the batteries if you don't use this product for a long time.

WARNING :

Turn off the power supply
before installation

Transmitter Instruction

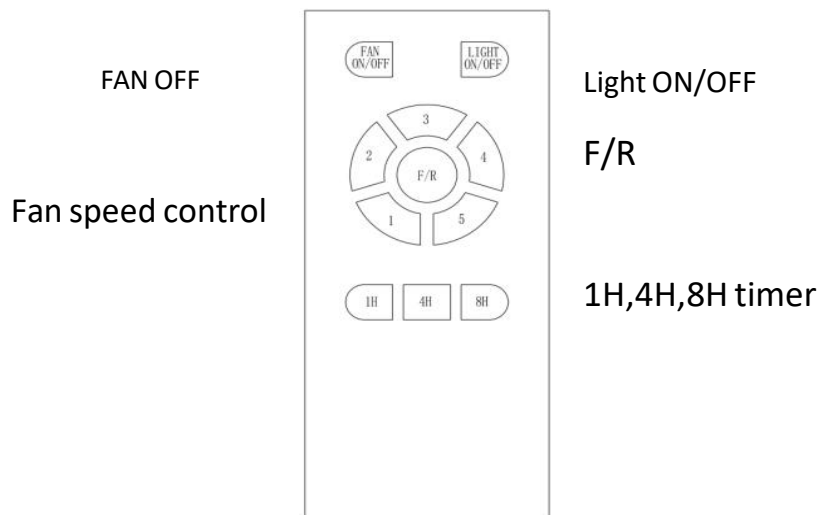

Digital matching

Immediately after power on, press and hold the "FAN OFF button until you hear twice beep, indicating success.

Tips:

The remote control has completed the learning pairing procedure before leaving the factory. After installation, it can be used directly. If you want to add or replace a new remote control, you need to pair it again.