
HAIKU

Enjoy the perfect blend of form and function with the expertly crafted Haiku from Big Ass Fans. With advanced features including automated SenseME™ technology, eight premium finishes, and available LED downlight and color-changing Chromatic Uplight, Haiku offers an unprecedented level of style, comfort, and control. Make the most of your favorite indoor and covered outdoor spaces with the whisper-quiet operation and world-class airflow from the world's most efficient smart fan.

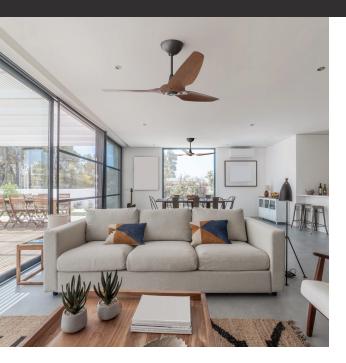

KEY FEATURES

- Three precision-balanced airfoils in Moso bamboo or aircraft-grade aluminum
- Built-in SenseME™ technology for automated convenience and efficiency
- LED downlight and Chromatic **Uplight** available together or separately
- **Permanent-magnet motor** for whisper-quiet, energy-efficient airflow
- Superior airflow control with bluetooth remote, seven speed settings, mobile app, and more
- Indoor and covered outdoor models available

DIAMETER - 1

52, 60, 84 IN (132, 152, 213 CM)

— MOUNTING -

- UNIVERSAL
- LOW PROFILE

CONTROL.

- BLUETOOTH REMOTE - 0-10V
- MOBILE APP - VOICE INTEGRATION

- OPTIONAL WIRED WALL CONTROL

- WARRANTY —

5 YEARS INDOOR

3 YEARS OUTDOOR



DISCOVER MORE ABOUT HAIKU

Learn more at bigassfans.com/fans/haiku/ or call our comfort experts for a free custom quote.

HAIKU

THE WORLD'S SMARTEST FAN JUST GOT BRIGHTER.



Airfoil Finishes















Hardware Finishes





















| Construction Features | | | | | | | | | | |
|--|---|---|--|---|-------------------------------------|---|--|--|--|--|
| Airfoils | Motor ¹ | Controls ² | Onboard Sensors ³ | Mounting | Environment⁴ | Accessories | | | | |
| Bamboo (indoor only) or aircraft-grade aluminum | High-efficiency, brushless DC/EC motor Fan Eco Mode | Bluetooth remote Big Ass Fans mobile app Voice control 0–10 V (optional) | Temperature, humidity, and motion sensors enable SenseME Technology | Flat or sloped ceilings 8 ft (2.4 m) or taller Maximum slope: 33° | Indoor or covered damp locations | Haiku Light Kit Chromatic Uplight (indoor only) 0–10 V Module Extended downrod lengths Stabilizer Kit | | | | |

| Ordering Information | | | | | | | | | | | |
|--|---|---------------------|---|--|-----------------|--|--|-----------|----------------------|--|--|
| Diameter | Environment and Mounting 5,6 | Airfoil Material | Hardware Finish | Airfoil Finish ⁷ Motor | | Downrod | Region | Downlight | Uplight ⁶ | | |
| | Indoor, Universal: 1806 Damp, Universal: 1906 | | | Black: F258 White: F259 Caramel Bamboo ⁷ : F221 | | | | | | | |
| 52 inch: MK-HK4-04 60 inch: MK-HK4-05 84 inch: MK-HK4-07 | Jamp, Low Profile: 2400 Damp, Low Profile: 2500 Indoor, Universal: 2406 Damp, Universal: 2506 | | Black: A258 White: A259 Satin Nickel: A470 Oil-Rubbed Bronze: A471 Good As Gold: A850 | Cocoa Bamboo?: F222 Natural Bamboo: F860 Caramel Wood Grain: F504 Cocoa Wood Grain: F654 Driftwood: F772 Satin Nickel: F470 Oil-Rubbed Bronze: F471 Brushed Aluminum: F531 Oh Shell Yeah: F277 | US, CA, MX: G10 | 12 inch: I12 20 inch: I20 32 inch: I32 | US, CA, MX: Blank APAC: R03 GCC: R04 | | Uplight: S80 | | |







Bluetooth Remote







Magnetic Wall Holder



Handheld

1 Activate Fan Eco Mode in Big Ass Fans app to fully leverage the energy savings from your ceiling fan.
2 Voice control requires an Amazon Alexa-enabled device or the Google Assistant.
3 SenseME Technology and the Haiku mobile app are supported by Android' and IOS⁹.
4 Damp-rated fans installed in covered outdoor locations must have fixed/permanent full overhead coverage extending at least two feet (61 cm) out from the airfoil tips on all sides. The included fan stabilizer must be installed. All suitable for cast all air environments. Fan must be installed at least 50 miles (80.5 km) inland from coast.
5 52- and 60-inch indoor fans with the both the uplight and downlight must use the universal mount, indoor only (1806), Low profile mount not available for 84-inch fans.
4 Uplight not available on damp-rated fans. Compatible with universal mount only. Light kits purchased separately.
5 Bamboo finishes are indoor use only.

Lead times may vary.


Warranty period and terms vary by country and application.



HAIKU

THE WORLD'S SMARTEST FAN JUST GOT BRIGHTER.





8.7 in. (221 mm)

Low Profile Mount

Universal Mount

| Universal Mount Downrod Lengths | | | | | | | | | | |
|---------------------------------|-----------------------|------------------------|--------------------|--|--------------------|------------------|--|--|--|--|
| Downrod (A) ¹ | Included Do | ownrod (Select at Tin | ne of Order) | Optional Downrods (Ordered Separately) | | | | | | |
| Downloa (A) | 12 in. (305 mm) | 20 in. (508 mm) | 32 in. (813 mm) | 7 in. (178 mm) | 48 in. (1219 mm) | 60 in. (1524 mm) | | | | |
| Fan Height (B) ² | 21 in. (533 mm) | 29 in. (737 mm) | 41 in. (1041 mm) | 16 in. (406 mm) | 57 in. (1448 mm) | 69 in. (1753 mm) | | | | |
| Ceiling Height | 9–10.5 ft (2.7–3.2 m) | 10.5-11 ft (3.2-3.4 m) | 11–13 ft (3.4–4 m) | 9-11 ft (2.7-2.9 m) | 13-14 ft (4-4.3 m) | >14 ft (>4.3 m) | | | | |

| Fan Specifications — Aluminum Airfoils | | | | | | | | | | | |
|--|-------------|---------------------|-----------|--------------------|------------------|----------------------------|---------------------------------------|--------------------------|--|--|--|
| Diameter | Mount | Weight ³ | Max Speed | Airflow Min/Max | Watts Min/Max | Operating Voltage | Ambient Operational Temperature | Sound Level ⁴ | | | |
| 52 in. | Low Profile | 16.5 lb (7.5 kg) | 177 RPM | 427 / 5,172 cfm | 2.4/15.1 W | 100–240 VAC, 1 Ф, 50–60 Hz | 32° to 104° F (0° to 40° C) | <35 dba at max speed | | | |
| (132 cm) | Universal | 15.5 lb (7 kg) | 199 RPM | 342 / 6,145 cfm | 2.5/20.1 W | | | | | | |
| 60 in. | Low Profile | 18.5 lb (8.4 kg) | 174 RPM | 403 / 6,062 cfm | 2.4/15.9 W | | | | | | |
| (152 cm) | Universal | 17.5 lb (8 kg) | 199 RPM | 509 / 7,281 cfm | 2.5 / 22.4 W | | | | | | |
| 84 in. (213 cm) | Universal | 26 lb (11.8 kg) | 128 RPM | 2,768 / 17,369 cfm | 3.8 / 42.3 W | | | | | | |

| Fan Specifications — Bamboo Airfoils ⁵ | | | | | | | | | | | |
|---|-------------|---------------------|-----------|--------------------|------------------|------------------------------|---------------------------------------|--------------------------|--|--|--|
| Diameter | Mount | Weight ³ | Max Speed | Airflow Min/Max | Watts Min/Max | Operating Voltage | Ambient Operational Temperature | Sound Level ⁴ | | | |
| 52 in. | Low Profile | 14 lb (6.4 kg) | 177 RPM | 331 / 5,731 cfm | 2.4/19.5 W | - 100–240 VAC, 1 Φ, 50–60 Hz | 32° to 104° F (0° to 40° C) | <35 dba at max speed | | | |
| (132 cm) | Universal | 13 lb (5.9 kg) | 200 RPM | 371/6,973 cfm | 3.5/28.92 W | | | | | | |
| 60 in. | Low Profile | 16 lb (7.3 kg) | 175 RPM | 479 / 6,319 cfm | 2.3/16.2 W | | | | | | |
| (152 cm) | Universal | 15 lb (6.8 kg) | 199 RPM | 596 / 7,632 cfm | 2.6 / 25.1 W | | | | | | |
| 84 in. (213 cm) | Universal | 21 lb (9.5 kg) | 128 RPM | 2,260 / 15,081 cfm | 3.6/32.9 W | | | | | | |

















Automate your comfort with SenseME

SenseME automatically adjusts your fans and lights to keep your home feeling and looking exactly the way you want it to. Download the Big Ass Fans mobile app to group multiple fans and set your comfort preferences for hands-free control.

- Optional downrod lengths packaged separately. The 7 in. (178 mm) downrod is not available for 84-inch (2134 mm) fans. 60 in. (1524 mm) is the longest downrod available.
 Fan heights do not include the Haiku Light kit. Add 0.8 in. (20 mm) for 84-inch (2134 mm) diameter fans.
 The precise fan weight will vary based on individual component weights and finishing.
 A ctual results of sound measurements in the field may vary due to sound reflective surfaces and environmental conditions.
 Bamboo airfolis must be installed in indoor, dry environments only.

Lead times may vary.

Warranty period and terms vary by country and application.

